


Curved ROBAX® glass ceramic panels are available in a number of different versions.

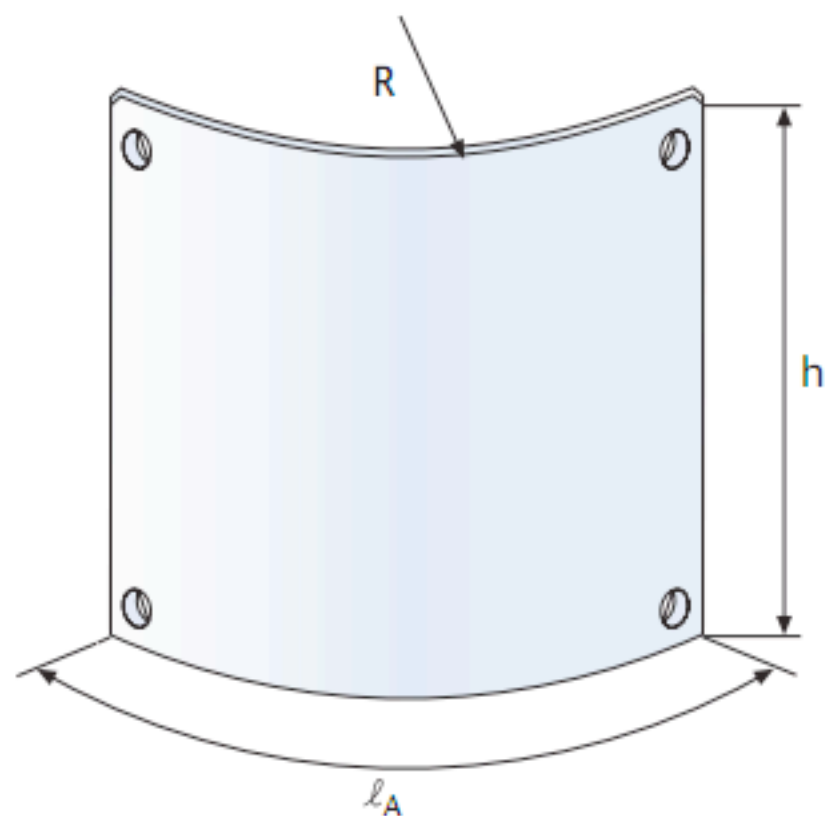

Minimum bending radius (R) = 200 mm

	Standard*	Maximum	Size	Tolerance
h panel height	200 – 600 mm	800 mm	$h \leq 500$ mm	± 1.0 mm
			$500 \text{ mm} < h \leq 600$ mm	± 1.5 mm
			$h > 600$ mm	Determined after first sample
l_A bow length	300 – 700 mm	1,000 mm	$l_A \leq 500$ mm	± 1.5 mm
			$l_A > 500$ mm	± 2.0 mm

Special shapes upon request.